

ACTION TO TAKE DURING AN EMERGENCY

It is essential to:

- Provide the information, via the emergency telephone, that is required to enable precise, coordinated action be taken.
- Respond calmly to any questions that are asked and to follow all instructions from those responsible within the company.

If you discover an emergency:

- Leave what you are doing and stop the work under safe conditions.
- Notify the person responsible.
- Follow all instruction from the personnel at all times.

If the order to evacuate is given:

- Use the established evacuation routes.
- Do not go back.

If you come across an injured person:

- Secure the location to prevent any further accidents from occurring.
- Immediately notify the person responsible for the installation.
- Do not move the victim.
- Do not give any liquids to an unconscious person.

IN CASE OF AN EMERGENCY

The telephone for sole use during emergencies (injured persons and/or environmental damage) at the ACCIONA Energía Renewable Energy Control Centre (CECOER) is.

948 00 63 16



Acciona Energía, S.A.

Avda. Ciudad de la Innovación, nº 5
31621 Sarriena. Navarra. España
Tel.: +34 948 00 60 00
Fax: +34 948 00 60 01
contact@acciona.es

www.acciona-energia.com

Collaborate
in environmental safety
and protection at the
SUBSTATION



INSTRUCTIONS FOR EMERGENCIES BASIC RULES FOR SAFETY, HEALTH AND THE ENVIRONMENT





General safety rules



Access by unauthorised persons is forbidden!

Visitors shall always be accompanied by the person responsible for the installation or someone delegated by him.

Respect the safety indications and do not cross the cordoned-off areas.

Pedestrians: use the indicated areas only.

Vehicles and machinery: access to the outside yard is forbidden without authorisation from Acciona Energía.



Throughout the installation: safety footwear.


If an electrical storm approaches, leave the outside yard immediately and take shelter in the buildings.

When inside the outside yard



Safety distances to "live" conductors (in cm)

Voltage (kV)	D PEL	D PROX 1	D PROX 2
<1	50	70	300
10	65	115	300
15	66	116	300
20	72	122	300
30	82	132	300
45	98	148	300
66	120	170	300
132	180	330	500
220	260	410	500
380	390	540	700

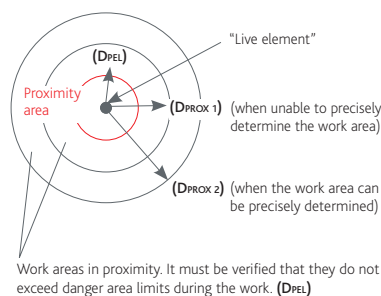

When the installation is powered up, extreme precaution shall be taken to ensure that the proximity area of any "live" conductor is not invaded. Do not raise any metal objects above shoulder height.

It is strictly forbidden to use flexometers or handle long or telescopic tools and objects (poles, bars, slats, etc) in the outside yard when the installation is powered up.

Respect the environment



Do not throw rubbish away or leave any waste in the installations. All waste shall be deposited in the provided special containers at the substation. In case of any doubt, ask the person in charge of the installation.



Do not store any chemical products in the substation without express authorisation from ACCIONA Energía.



Avoid spilling chemical products. If a spill does occur, quickly attempt to control it in order to reduce its impact. Remove all contaminated and absorbent material and handle them as hazardous waste. In case of any doubt, ask the person in charge of the installation.



Do not dump any chemical products down manholes.

Notify all detected environmental risk situations.